


MONOLITHIC INSULATING JOINTS Class PN10 specification

Working Temperature	Electric insulation	Dielectric resistance	Testing pressure	Working pressure
-10°C+70°C	10 Mohm	3.0 KV	15kg/cm ²	10kg/cm ²

SS-Welding Welding

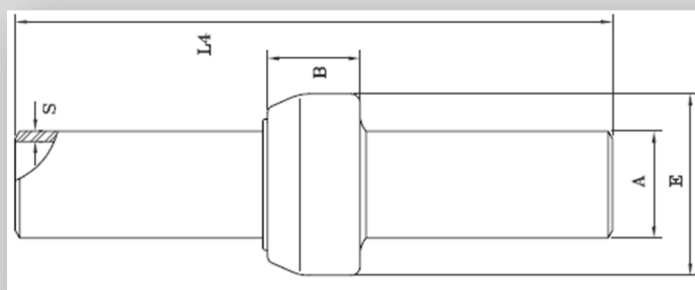

- Hot forged socket: ASTM A 105 or equivalent
- Hot forged spigot: API 5L gr.B or equivalent
- Insulating ring in polycarbonate
- Gasket ring in Hytrel 40 D Dupont
- Epoxyphenolic painting
- Manufactured and tested in accordance to UNI CIG 10284

Product Code	ND	A	E	B	L4	Weight (in Kg)
SS015	1/2"	21,3	46	28	210	0,5
SS020	3/4"	26,7	53	30	225	0,7
SS025	1"	33,4	60	32	245	1,0
SS032	1" 1/4	42,2	71	35	270	1,5
SS040	1" 1/2	48,3	77	37	280	1,7
SS050	2"	60,3	90	38	290	2,3
SS065	2"1/2	76,1	113	53	330	4,5
SS080	3"	88,9	127	56	400	6,0

NB: The dimensions reported in the table are in millimeters (mM)

Certificates issued: EN 10204 3.1 and CE compliance

 	INSULATION JOINT II 3 GD Zone Ex T6 Technical file: A02-MS	
	Technical File : A02-MS	Anno: 2021