MECCANICA SEGRINO S.r.l.

22035 CANZO (CO) Italia - Via Tagliamento N°10
T1. +39 031682775- T2.+39 0316730637
www.meccanicasegrino.com – info@meccanicasegrino.com

Certificate n°4892/3

Certificate n° IT-53861

MONOLITHIC INSULATING JOINTS Class PN10 specification

Working Temperature	Electric insulation	Dielectric resistance	Testing pressure	Working pressure
-10°C+70°C	10 Mohm	3.0 KV	15kg/cm^2	10kg/cm^2

SS-Welding Welding

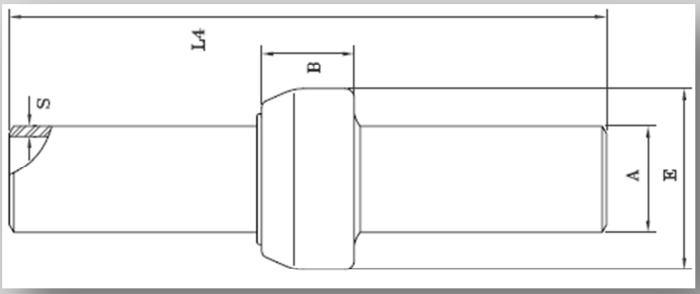

- **Hot forged socket: ASTM A 105 or equivalent**
- **Hot forged spigot: API 5L gr.B or equivalent**
- **Insulating ring in polycarbonate**
- **Gasket ring in Hytrel 40 D Dupont**
- **Epoxyphenolic painting**
- **Manufactured and tested in accordance to UNI CIG 10284**

Product Code	ND	A	E	B	L4	Weight (in Kg)
SS015	1/2"	21,3	46	28	210	0,5
SS020	3/4"	26,7	53	30	225	0,7
SS025	1"	33,4	60	32	245	1,0
SS032	1" 1/4	42,2	71	35	270	1,5
SS040	1" 1/2	48,3	77	37	280	1,7
SS050	2"	60,3	90	38	290	2,3
SS065	2"1/2	76,1	113	53	330	4,5
SS080	3"	88,9	127	56	400	6,0

NB: The dimensions reported in the table are in millimeters (mM)

Certificates issued: EN 10204 3.1 and CE compliance

CE Ex	**INSULATION JOINT** **II 2 GD Zone 1 e 21 d T5** **Technical file: A02-MS**
Technical File : **A02-MS**	Anno: **2014**